Product of Thailand
Manufactured by BLUE LABEL Co.,Ltd.
48/58 Moo1 Ekachai Rd. Kok-Krabu, Mueng, Samutsakorn 74000 Thailand
Tel: (+66)34434774-5 www.bluelabelgroup.com

BLUE LABEL

RHINOZ
ARCHITECTURAL COATING SYSTEM

Product Data Sheet
RF-126 RHINOZ Sand Stone

PRODUCT DESCRIPTION

RHINOZ Sand Stone is 100% acrylic water-based, used as a decorative textured coating which gives sand finish. It contains active biocides to resist growth of mold and mildew on the paint film. Comes in 4 series, with 12 colors in each, the product gives natural effect of sand and stone particles. It is ideal for interior and exterior walls, pillars, ceilings and other architectural structures. It can be used over variety of common substrate materials such as concrete, masonry, plaster, fiber cement, gypsum board, etc.

PRODUCT ADVANTAGES

Easy to apply and low smell
Good adhesion
High strength and durability
Good weather resistance
Interior and exterior use
Antimicrobial

TECHNICAL DATA

Base	: Acrylic polymer
Appearance	: Colored viscous paste
pH	: 8.0 - 10.0
Density	: 1.6 - 1.8 g/cm^3
Dry to touch	: 1 - 2 hours (Depend on condition)
Hard dry	: overnight (Depend on condition)
Full cure time	: 7 days (Depend on condition)

PACKING DATA

5 kg	4 units/ carton	30 cartons/ 1 full pallet
25 kg	1 unit/ carton	36 carton/ 1 full pallet

COVERAGE

3 - 5 sqm/ 5kg for 1 mm thickness

COLOR CHART

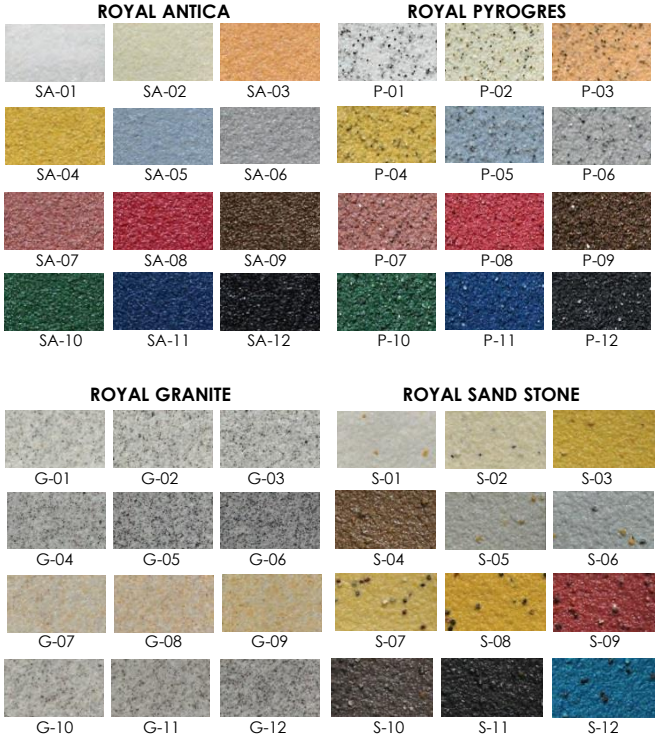

TOOLS & EQUIPMENT

Hopper Gun (2-3 mm nozzle is recommended), Paint Roller, Trowel

APPLICATION PROCESS

1. Clean the surface with damp cloth. Surfaces must be clean, dry, structurally sound, and free from other materials that will have effect on adhesion.
2. Apply 1 coat of RHINOZ Sand Stone Primer or proper primer to improve adhesion to substrates, then leave it dry for 15-30 minutes. Not recommend to leave the surface too long after applied primer, as the surface might be collecting some dust.
3. Spray 1st coat of RHINOZ Sand Stone with hopper gun to create texture. Roller or trowel can be used for application and creating texture. Leave it dry for about 30 minutes before applying the 2nd coat (optional).
4. Leave it to completely dry for at least 12 hours or over night before applying appropriate sealer for surface protection. The sandstone surface will be completely cured in 7 days.

Sealer Types	Area
RHINOZ Acrylic Top (W) *(water-based)*	Internal area
RHINOZ Acrylic Top (S) *(solvent-based)*	External area

RECOMMENDED USES

Tuscan/ Moroccan / Zen style of residence or building

Exterior & Interior Wall	Mall
Show Room	Restaurant & Café
Gallery Studio	Office
Theme Park	Meeting Room
Resort & Hotel	Statue & Sculpture

Large wall area that needs fast application
Furniture that needs sand texture

RECOMMENDATION

- Store in dry place with 1 year shelf life in the original unopened packing, at the temperature under 50 ^{0}C.
- Stir the sand stone using spinning mixer thoroughly before usage, as the sand particles may deposit at the bottom of the package.
- Do not mix the product with water, as the product is ready-to-use.
- Not recommended to use on the floor or surface that is always in contact with water or moisture e.g. swimming pool, shower recess area, etc.
- Not recommended to be painted over.
- In case the product is not yet finished up, close the package lid tightly for reusing.